

Product Highlights

Share Your High-Speed 4G Internet

Simply insert your 4G-enabled SIM card to share high-speed mobile Internet connection with multiple devices via Wi-Fi or Ethernet cables

High-Speed Connectivity

Enjoy combined Wi-Fi speeds of up to 1200 Mbps¹ with dual-band wireless AC as well as Gigabit connection for wired devices

Multi-WAN Support

Fail-safe Internet with fixed line and mobile Internet support for a reliable and uninterrupted Internet connection



DWR-953

Wireless AC1200 4G LTE Multi-WAN Router

Features

Connectivity

- Share your 3G/4G connection with multiple devices
- Uses a SIM/UICC card to connect to the Internet
- One Gigabit WAN port to connect to broadband Internet
- Four Gigabit Ethernet LAN ports to connect wired devices
- Fast Wireless 802.11ac/n/g/b/a
- Easy-to-use web GUI

Security Features

- Industry-standard WPA/WPA2 encryption
- Network Address Translation (NAT) firewall
- Stateful Packet Inspection (SPI) firewall

D-Link's DWR-953 Wireless AC1200 4G LTE Multi-WAN Router allows you to share a high speed 4G LTE mobile broadband network with multiple devices through Wi-Fi or wired connection. Once connected, you can transfer data, stream media, and send SMS messages. Simply insert your SIM card and share your 4G LTE Internet connection through a secure wireless network or any of the four Gigabit Ethernet LAN ports.

Fast Mobile Internet and Wireless AC

The Wireless AC1200 4G LTE Multi-WAN Router lets you connect to your 4G LTE mobile network with throughput speeds of up to 150 Mbps¹, giving you the speed you need for fast, responsive Internet access. In addition to this, the DWR-953 uses dual-band wireless AC technology, providing combined wireless speeds of up to 1200 Mbps¹ over 2.4GHz and the less congested 5GHz wireless bands.


Reliable, Uninterrupted Internet Connection

The Gigabit Ethernet WAN port allows you to attach a DSL/cable modem as the primary or backup link, while auto-failover ensures an uninterrupted connection by automatically connecting to your 4G LTE network whenever the WAN link is lost. The built-in QoS management feature also prioritizes traffic to ensure that the most important data receives optimum bandwidth.

Easy to Set Up and Use

Set up your network in minutes; the DWR-953 comes equipped with an easy-to-follow setup wizard to get you up and running right away. It comes preconfigured with global carrier profiles to help you get the most out of your LTE connection right out of the box. Older wireless devices such as 802.11g/b clients are compatible with the Wireless AC1200 4G LTE Multi-WAN Router, enabling you to get started without issues.

Your Network Setup

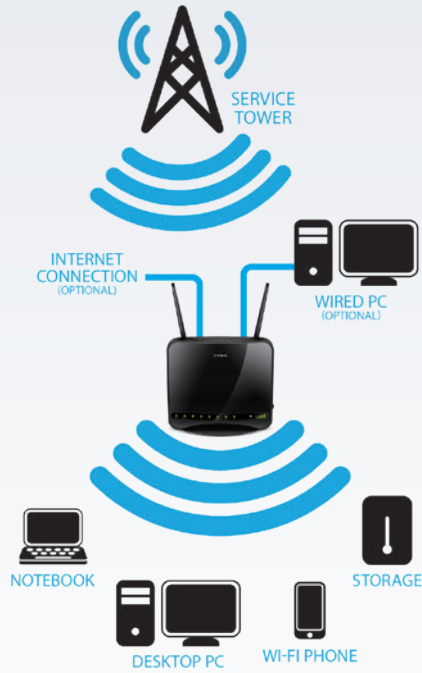

Devices Interfaces



DWR-953 Wireless AC1200 4G LTE Multi-WAN Router

Technical Specifications

General

Frequency Support	<ul style="list-style-type: none"> LTE Bands: <ul style="list-style-type: none"> Release 10, Cat 4: Bands 1/2/3/5/7/8/20/38/40 (FDD: 2100/1900/1800/850/2600/900/800 MHz, TDD: 2600/TDD 2300 MHz) 	<ul style="list-style-type: none"> Pentaband UMTS/HSPA/HSPA+/DC-HSPA+ <ul style="list-style-type: none"> 1/2/3/5/8 (2100/1900/1800/850/900 MHz) Quadband GSM/GPRS/EDGE <ul style="list-style-type: none"> 850/900/1800/1900 MHz
Device Interfaces	<ul style="list-style-type: none"> One 10/100/1000 Gigabit Ethernet WAN port Four 10/100/1000 Gigabit Ethernet LAN ports 	<ul style="list-style-type: none"> Two detachable 4G LTE antennas
Data Rates ¹	<ul style="list-style-type: none"> LTE Downlink: Up to 150 Mbps¹ LTE Uplink: Up to 50 Mbps¹ 	<ul style="list-style-type: none"> DC-HSPA Downlink: Up to 42 Mbps¹ DC-HSPA Uplink: Up to 5.72 Mbps¹
Standards	<ul style="list-style-type: none"> 802.11ac/n/g/b/a 802.3i 	<ul style="list-style-type: none"> 802.3u
Wi-Fi Data Rates	<ul style="list-style-type: none"> Up to 866 Mbps with 802.11ac clients¹ Up to 300 Mbps with 802.11n clients¹ 	<ul style="list-style-type: none"> 6/9/11/12/18/24/36/48/54 Mbps in 802.11g mode¹ 1/2/5.5/11 Mbps in 802.11b mode¹

Functionality

Wireless Encryption	<ul style="list-style-type: none"> 64/128-bit WEP (Wired Equivalent Privacy) 	<ul style="list-style-type: none"> WPA & WPA2 (Wi-Fi Protected Access)
Firewall	<ul style="list-style-type: none"> Network Address Translation (NAT) 	<ul style="list-style-type: none"> Stateful Packet Inspection (SPI)
Advanced Features	<ul style="list-style-type: none"> L2TP/PPTP/IPSec VPN Passthrough User configurable multi-WAN DMZ (Demilitarized Zone) Port/Application Forwarding 	<ul style="list-style-type: none"> URL Filter QoS engine (Quality of Service) Scheduler Virtual server

Physical

LED Status Indicators	<ul style="list-style-type: none"> Power Internet 5 GHz 2.4 GHz 4G 	<ul style="list-style-type: none"> 2G/3G LAN WAN SMS Signal Strength
Dimensions	<ul style="list-style-type: none"> 170 x 180 x 80 mm (6.69 x 7.09 x 3.15 in) 	
Weight	<ul style="list-style-type: none"> 400 g (14.1 oz) 	
Temperature	<ul style="list-style-type: none"> Operating: 0 to 40 °C (32 to 104 °F) 	<ul style="list-style-type: none"> Storage: -10 to 70 °C (14 to 158 °F)
Humidity	<ul style="list-style-type: none"> Operating: 10% to 90% non-condensing 	<ul style="list-style-type: none"> Storage: 0% to 95% non-condensing
Certifications	<ul style="list-style-type: none"> CE 	

¹ Data rates are theoretical. Data transfer rate depends on network capacity, signal strength, and environmental factors.



For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., First Floor, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2019 D-Link Corporation. All rights reserved. E&OE.

Updated February 2019

D-Link[®]