

Product Highlights

Covers Vast Distances


Support for maximum cable lengths of between 550 meters and 80 kilometers¹ is ideal for businesses spanning multiple premises

High Performance

Full duplex Gigabit data transfer rates provide the network transmission speeds that business environments demand

Hot Pluggable

Easily switch out transceivers while the power is on, facilitating network maintenance and minimizing downtime

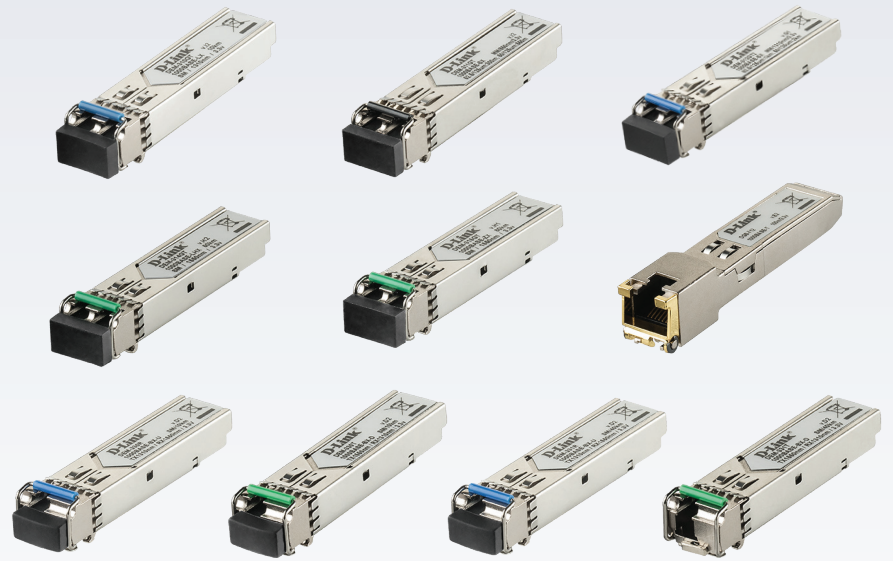

DEM-300 Series

Gigabit SFP/Ethernet Transceivers

Features

- Small Form factor Pluggable (SFP)
- Multi-Source Agreement (MSA) specification compliant
- IEEE 802.3z standard
- Supports cable distances of up to 100 m / 550 m / 2 km / 10 km / 40 km / 50 km / 80 km¹
- Hot pluggable
- FDA, CDRH, TUV Laser Eye safety certified
- TTL signal detect indicator
- Metal enclosure reduces EMI

D-Link Gigabit SFP Transceivers plug into Gigabit and Fast Ethernet switches via their GBIC slots. They allow for the expansion of Gigabit Ethernet networks by providing high-speed connections over a fiber-optic or twisted-pair cable. The fiber-optic transceivers have standard duplex LC connectors to provide maximum compatibility. They are hot pluggable and Small Form Factor Pluggable (SFP) compliant with the Multi-Source Agreement (MSA) specification.

Small Form Pluggable (SFP) Package

The Gigabit SFP/Ethernet Transceivers use the Small Form-factor Pluggable (SFP) design. They provide the necessary signal amplification for data to be transmitted to the network cable from the port, and vice versa. The SFP form factor is advantageous because it is smaller than other form factors such as Xenpak, X2, and 10G XFP, ensuring lower costs, lower power disruption, and higher port density.

Multiple Applications

Applications of the DEM-300 Series fiber transceivers include distributed multi-processing, Gigabit switch cascading, high-speed I/O file transfer, bus extension application, and channel extender/data storage. This versatility is invaluable for an expanding network, and helps the infrastructure grow with the business.

Hot Pluggable

All D-Link transceivers are hot pluggable. You can connect a transceiver while the system is powered on without causing any issues, and easily swap one for another without having to reboot the switch each time. This permits modules to be added or removed without interrupting the network, facilitating maintenance and greatly reducing downtime.

DEM-300 Series Gigabit SFP/Ethernet Transceivers

Technical Specifications			
	DEM-310GT	DEM-311GT	DEM-312GT2
Transceiver Type	• SFP	• SFP	• SFP
Fiber Media Support	• Single-Mode	• Multi-Mode	• Multi-Mode
Speed	• 1.25 Gbps	• 1 Gbps	• 1 Gbps
Distance	• 10 km	• 550 m	• 62.5/125 um fiber: 1 km • 50/125 um fiber: 2 km
Compliant Standard	• IEEE802.3z 1000BASE-LX	• IEEE802.3z 1000BASE-SX	• IEEE802.3z 1000BASE-SX
Connector	• Duplex LC connector	• Duplex LC connector	• Duplex LC connector
Single/Bi Direction	• Single-direction	• Single-direction	• Single-direction
Wavelength	• 1310 nm	• 850 nm	• 1310 nm
Cable Type	• Single-mode 9/125 um fiber	• Multi-mode 50/125 um or 62.5/125 um fiber	• Multi-mode 50/125um or 62.5/125um fiber
Power Supply	• 3.3V	• 3.3V	• 3.3V
Hot Pluggable	✓	✓	✓
MSA Compliant	✓	✓	✓
RoHS Compliant	✓	✓	✓

	DEM-314GT	DEM-315GT	DGS-712
Transceiver Type	• SFP	• SFP	• RJ45
Fiber Media Support	• Single-Mode	• Single-Mode	• N/A
Speed	• 1.25 Gbps	• 1 Gbps	• 1 Gbps
Distance	• 50 km	• 80 km	• 100 m
Compliant Standard	• IEEE802.3z 1000BASE-LHX	• IEEE802.3z 1000BASE-ZX	• IEEE 802.3ab 1000BASE-T
Connector	• Simplex LC connector	• Simplex LC Connector	• RJ45
Single/Bi Direction	• WDM bi-direction	• WDM bi-direction	• N/A
Wavelength	• 1550 nm	• 1550 nm	• N/A
Cable Type	• Single-mode 9/125 um fiber	• Single-mode 9/125 um fiber	• Cat5, Cat5e, Cat6
Power Supply	• 3.3V	• 3.3V	• 3.3V
Hot Pluggable	✓	✓	✓
MSA Compliant	✓	✓	✓
RoHS Compliant	✓	✓	✓

DEM-300 Series Gigabit SFP/Ethernet Transceivers

	DEM-330T	DEM-330R	DEM-331T	DEM-331R
Transceiver Type	• SFP	• SFP	• SFP	• SFP
Fiber Media Support	• Single-Mode	• Single-Mode	• Single-Mode	• Single-Mode
Speed	• 1.25 Gbps	• 1.25 Gbps	• 1.25 Gbps	• 1.25 Gbps
Distance	• 10 km	• 10 km	• 40 km	• 40 km
Compliant Standard	• IEEE802.3ah 1000BASE-BX-D	• IEEE802.3ah 1000BASE-BX-U	• IEEE802.3ah 1000BASE-BX-D	• IEEE802.3ah 1000BASE-BX-U
Connector	• Simplex LC connector	• Simplex LC connector	• Simplex LC connector	• Simplex LC connector
Single/Bi Direction	• Bi-direction	• Bi-direction	• Bi-direction	• Bi-direction
Wavelength	• Tx: 1550 nm • Rx: 1310 nm	• Tx: 1310 nm • Rx: 1550 nm	• Tx: 1550 nm • Rx: 1310 nm	• Tx: 1310 nm • Rx: 1550 nm
Cable Type	• Single-mode 9/125 um fiber	• Single-mode 9/125 um fiber	• Single-mode 9/125 um fiber	• Single-mode 9/125 um fiber
Power Supply	• 3.3 V	• 3.3 V	• 3.3 V	• 3.3 V
Hot Pluggable	✓	✓	✓	✓
MSA Compliant	✓	✓	✓	✓
RoHS Compliant	✓	✓	✓	✓
Order Information				
Part Number	Description			
DEM-310GT	1000BASE-LX Single-Mode 10 km SFP Transceiver			
DEM-311GT	1000BASE-SX Multi-Mode 550 m SFP Transceiver			
DEM-312GT2	1000BASE-SX Multi-Mode 2 km SFP Transceiver			
DEM-314GT	1000BASE-LHX Single-Mode 50 km SFP Transceiver			
DEM-315GT	1000BASE-ZX Single-Mode 80 km SFP Transceiver			
DEM-330T	1000BASE-BX-D Single-Mode 10 km (TX-1550/RX-1310 nm) SFP Transceiver			
DEM-330R	1000BASE-BX-U Single-Mode 10 km (TX-1310/RX-1550 nm) SFP Transceiver			
DEM-331T	1000BASE-BX-D Single-Mode 40 km (TX-1550/RX-1310 nm) SFP Transceiver			
DEM-331R	1000BASE-BX-U Single-Mode 40 km (TX-1310/RX-1550 nm) SFP Transceiver			
DGS-712	1000BASE-T Copper 100 m SFP Transceiver			

¹ Transmission distance dependent on model.

Updated 01/31/2024