

## Product Highlights

### Next Generation Connectivity

802.11ac Wave 2 technology delivers a combined speed up to 1267 Mbps<sup>1</sup> to enable an experience of unparalleled speed and reliable connection

### Optimal Wireless Experience

The embedded Smart Antenna improves throughput and coverage by greatly reducing co-channel interference

### Unparalleled Levels of Performance

Experience smooth and stable performance with a powerful CPU and better traffic management with bandsteering and airtime fairness



## DWL-6620APS

# Wireless AC1300 Wave 2 Unified Access Point with Smart Antenna

## Features

### Ideal for Business

- Can be centrally managed by D-Link Wireless Controllers (DWC-1000/DWC-2000)
- Up to 32 virtual access points may be created from a single access point
- Flexible QoS with Wi-Fi Multimedia (WMM)
- IEEE 802.3at Power Over Ethernet (PoE) enables installation in hard to reach locations
- UL2043 certified housing

### High-Performance Connectivity

- Smart Antenna technology
- MU-MIMO technology increases wireless network capacity and overall throughput
- Bandsteering for efficient traffic management
- Two Gigabit Ethernet LAN ports supporting Link Aggregation
- Airtime fairness

### Trusted Wireless Security Features

- WPA/WPA2 Personal
- WPA/WPA2 Enterprise
- MAC address filtering
- Rogue AP detection

The DWL-6620APS Wireless AC1300 Wave 2 Unified Access Point is designed for small to medium businesses and enterprises, as well as high-density public areas, providing greater throughput and flexibility for medium to large-scale Wi-Fi networks. Featuring D-Link Smart Antenna technology, the DWL-6620APS allows your wireless clients to enjoy an unprecedented Wi-Fi experience and reliable connection.

## Greater Speed and Connectivity

The DWL-6620APS provides unparalleled connectivity by using the 802.11ac Wave 2 standard, allowing high combined data rates of 1267 Mbps<sup>1</sup> (867 Mbps for 802.11ac and 400 Mbps for 802.11n) over the air. Besides the high dual-band throughput connections over the two bands, Wi-Fi Multimedia (WMM) and 802.1p Quality of Service (QoS) can give time-sensitive traffic like VoIP or video streaming Differentiated Services Code Point (DSCP) higher priority ahead of other traffic. Wireless clients can stream media faster and smoother than before using existing devices.

## Smart Antenna Technology

An unreliable connection is the biggest challenge in current Wi-Fi usage. When client devices move to dead spots or out of coverage, the throughput can suddenly drop. Interference from neighbouring access points or other sources of co-channel interference are additional factors that inhibit the stability of wireless connections. D-Link Smart Antenna technology is a complete solution that combines hardware with an embedded software algorithm. The software algorithm integrated with the Wi-Fi driver helps to select the optimal radiation pattern for each client and cooperate with digital beamforming to enhance the antenna gain and achieve the best throughput. The fast channel and bandwidth selection feature scans all channels and selects the cleanest channel with the least interference in a very short timeframe. Null Steering Capability curtails the power in the direction of interference to mitigate its influence. The beam pattern is adapted dynamically per packet basis. With these capabilities, the D-Link Smart Antenna strengthens the connection reliability in real-time and optimises the wireless user experience.



# DWL-6620APS Wireless AC1300 Wave 2 Unified Access Point with Smart Antenna

D-Link Smart Antenna focuses RF power in the direction of connected clients, unlike traditional antennas that uniformly radiate power in all directions.



D-Link Smart Antenna selects optimal radiation patterns and decreases the power in the directions of the interference to mitigate the influence of co-channel interference.



## Performance Upgrade

The DWL-6620APS features an upgraded CPU, providing increased performance compared to its predecessor. Bandsteering technology enables the DWL-6620APS to intelligently place clients on the optimal wireless band to avoid congestion and allows for smooth streaming of video, seamless browsing, and fast downloads for mobile devices. Airtime fairness ensures that equal airtime is given to each client, providing increased performance even if slower devices are connected.

The DWL-6620APS supports 802.11ac wave 2 MU-MIMO technology that enables the access point to communicate with multiple clients simultaneously, resulting in significantly improved network capacity and throughput.

## Centrally Manage Your Wireless Network

When deployed in conjunction with D-Link Wireless Controllers (DWC-1000/DWC-2000), up to 1,024 DWL-6620APS access points can be centrally managed. This allows for a large number of access points to be deployed and managed easily and efficiently. Once the APs are discovered by the controller, the administrator can push the configuration to them as a group, instead of doing so individually. Additionally, Radio Frequency (RF) resource management<sup>2</sup> allows wireless coverage to be managed centrally, providing the best coverage possible for wireless clients.

## D-Link Assist Rapid Response Support

If the worst should happen to your network you need the very best support and fast. Downtime costs your business money. D-Link Assist maximises your uptime by solving technical problems quickly and effectively. Our highly trained technicians are on standby around the clock, ensuring that award-winning support is only a phone call away.

With a choice of three affordable service offerings covering all D-Link business products, you can select the package that suits you best:

### D-Link Assist Gold - for comprehensive 24-hour support

D-Link Assist Gold is perfect for mission-critical environments where maximum uptime is a high priority. It guarantees four hour around-the-clock response. Cover applies 24/7 for every day of the year including holidays.

### D-Link Assist Silver - for prompt same-day assistance

D-Link Assist Silver is designed for 'high availability' businesses that require rapid response within regular working hours. It provides a four hour response service Monday to Friday from 8am to 5pm, excluding holidays.

### D-Link Assist Bronze - for guaranteed response on the next business day

D-Link Assist Bronze is a highly cost-effective support solution for less critical environments. Response is guaranteed within eight business hours Monday to Friday from 8am to 5pm, excluding holidays.

D-Link Assist can be purchased together with any D-Link business product. So whether you're buying switching, wireless, storage, security or IP Surveillance equipment from D-Link, your peace of mind is guaranteed. D-Link Assist also offers installation and configuration services to get your new hardware working quickly and correctly.

## Technical Specifications

### General

Interfaces	<ul style="list-style-type: none"> <li>• 802.11b/g/n 2.4 GHz</li> <li>• 802.11a/n/ac Wave 2 5 GHz</li> <li>• Two 10/100/1000BASE-T LAN PoE ports</li> <li>• One RJ45 console port</li> </ul>	<ul style="list-style-type: none"> <li>• Power switch</li> <li>• Reset button</li> <li>• Power connector</li> </ul>
Antenna	<ul style="list-style-type: none"> <li>• 2x2 Internal Smart Antennas</li> </ul>	
Data Rate <sup>1</sup>	<ul style="list-style-type: none"> <li>• 2.4 GHz – Up to 400 Mbps</li> </ul>	<ul style="list-style-type: none"> <li>• 5 GHz – Up to 867 Mbps</li> </ul>

### Functionality

Operating Frequency	<ul style="list-style-type: none"> <li>• 2400 to 2483.5 MHz</li> </ul>	<ul style="list-style-type: none"> <li>• 5150 to 5850 MHz</li> </ul>
Operating Channels	<ul style="list-style-type: none"> <li>• 1 to 13 channels for 2.4 GHz band (per country code)</li> </ul>	<ul style="list-style-type: none"> <li>• 36 to 165 channels for 5 GHz band (per country code)</li> </ul>
System Management	<ul style="list-style-type: none"> <li>• Web-based user interface (HTTP/HTTPS)</li> <li>• Command-Line Interface (CLI)</li> </ul>	<ul style="list-style-type: none"> <li>• Telnet/SSH</li> </ul>

### Security


SSID Security	<ul style="list-style-type: none"> <li>• Up to 32 SSIDs, 16 per radio</li> <li>• 802.1Q VLAN</li> </ul>	<ul style="list-style-type: none"> <li>• Station Isolation</li> </ul>
Wireless Security	<ul style="list-style-type: none"> <li>• WPA/WPA2 Personal/Enterprise</li> </ul>	<ul style="list-style-type: none"> <li>• AES and TKIP</li> </ul>
Detection & Prevention	<ul style="list-style-type: none"> <li>• Rogue and valid AP classification</li> </ul>	
Authentication	<ul style="list-style-type: none"> <li>• MAC address filtering</li> </ul>	

### Physical


Dimensions	<ul style="list-style-type: none"> <li>• 220 x 55.45 mm (8.66 x 2.18 in.)</li> </ul>	
Weight	<ul style="list-style-type: none"> <li>• 0.614 kg (1.35 lbs) without bracket</li> </ul>	<ul style="list-style-type: none"> <li>• 0.663 kg (1.46 lbs) with bracket</li> </ul>
Power Supply	<ul style="list-style-type: none"> <li>• External Power Adapter: 12 VDC 2A (not included)</li> </ul>	<ul style="list-style-type: none"> <li>• Powered by 802.3at PoE power</li> </ul>
Power over Ethernet	<ul style="list-style-type: none"> <li>• 10/100/1000 Mbps 802.3at PoE input on LAN 1 Port</li> </ul>	
Max Power Consumption	<ul style="list-style-type: none"> <li>• 16.32 W</li> </ul>	
Enclosure	<ul style="list-style-type: none"> <li>• Bottom cover – plastic</li> <li>• Top cover – plastic</li> </ul>	<ul style="list-style-type: none"> <li>• UL2043 certified housing</li> </ul>
Temperature	<ul style="list-style-type: none"> <li>• Operating: 0 to 40 °C (32 to 104 °F)</li> </ul>	<ul style="list-style-type: none"> <li>• Storage: -20 to 65 °C (-4 to 149 °F)</li> </ul>
Humidity	<ul style="list-style-type: none"> <li>• Operating: 10% to 90% non-condensing</li> </ul>	<ul style="list-style-type: none"> <li>• Storage: 5% to 95% non-condensing</li> </ul>
Meantime Between Failure (MTBF)	<ul style="list-style-type: none"> <li>• 925,606 hours</li> </ul>	
Certifications	<ul style="list-style-type: none"> <li>• CE</li> <li>• EN55032, EN55024, EN61000-3-2, EN61000-3-3, EN60601-1-2 (Medical electrical equipment), EN301489-1, EN301489-17, EN300328, EN301893</li> <li>• FCC</li> <li>• IC</li> </ul>	<ul style="list-style-type: none"> <li>• cUL+UL</li> <li>• LVD</li> <li>• RCM</li> <li>• NCC</li> <li>• BSMI</li> <li>• UL2043</li> </ul>

## Radio Patterns<sup>3</sup>: Omni-Directional Mode


### 2.4 GHz Antenna Ceiling Mounted

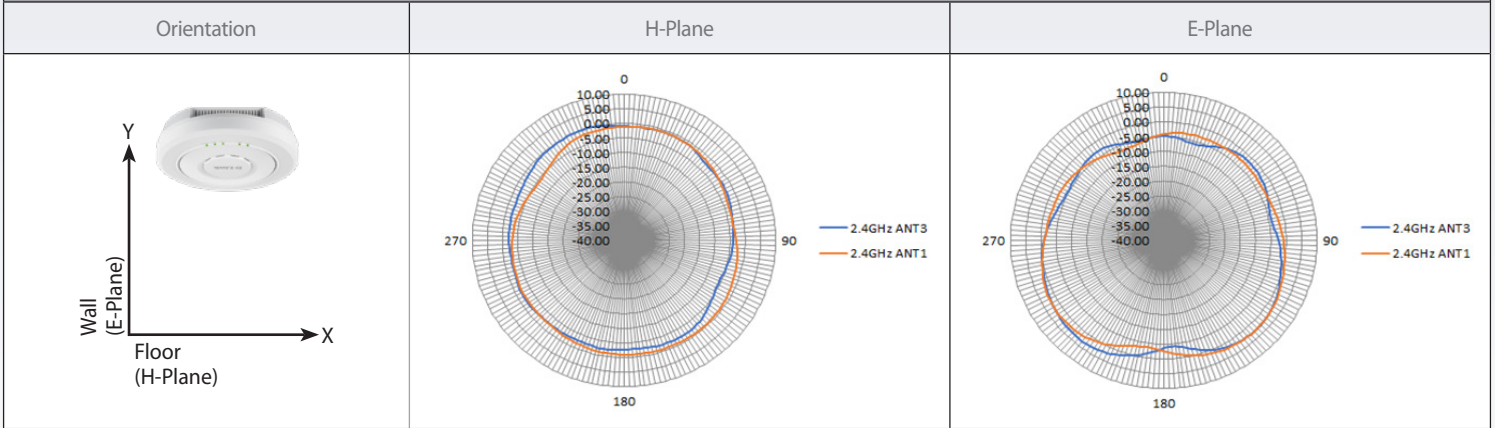

### 2.4 GHz Antenna Wall Mounted

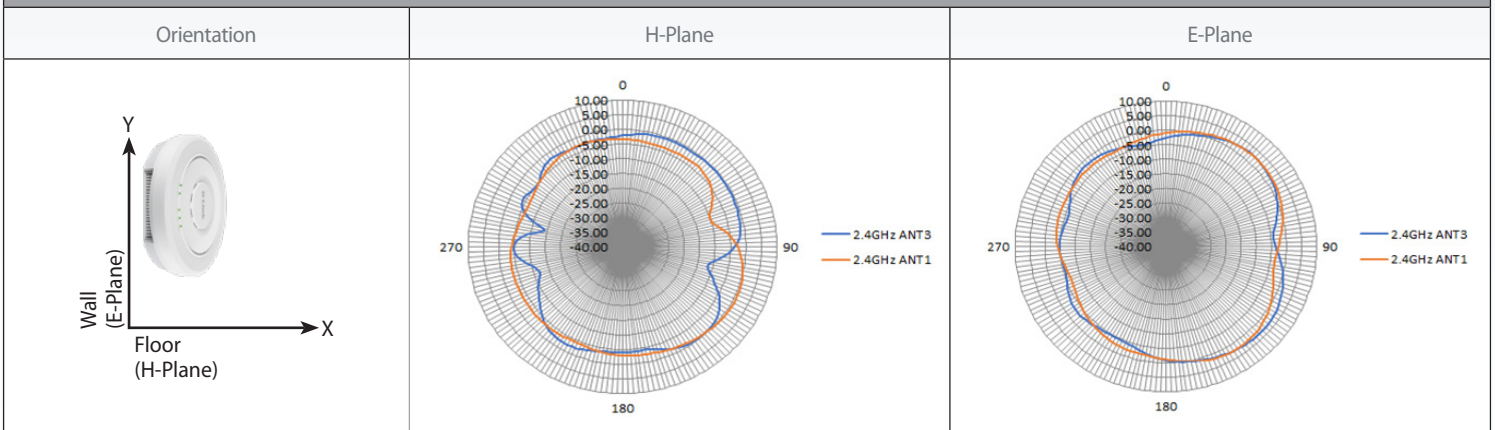

# DWL-6620APS Wireless AC1300 Wave 2 Unified Access Point with Smart Antenna

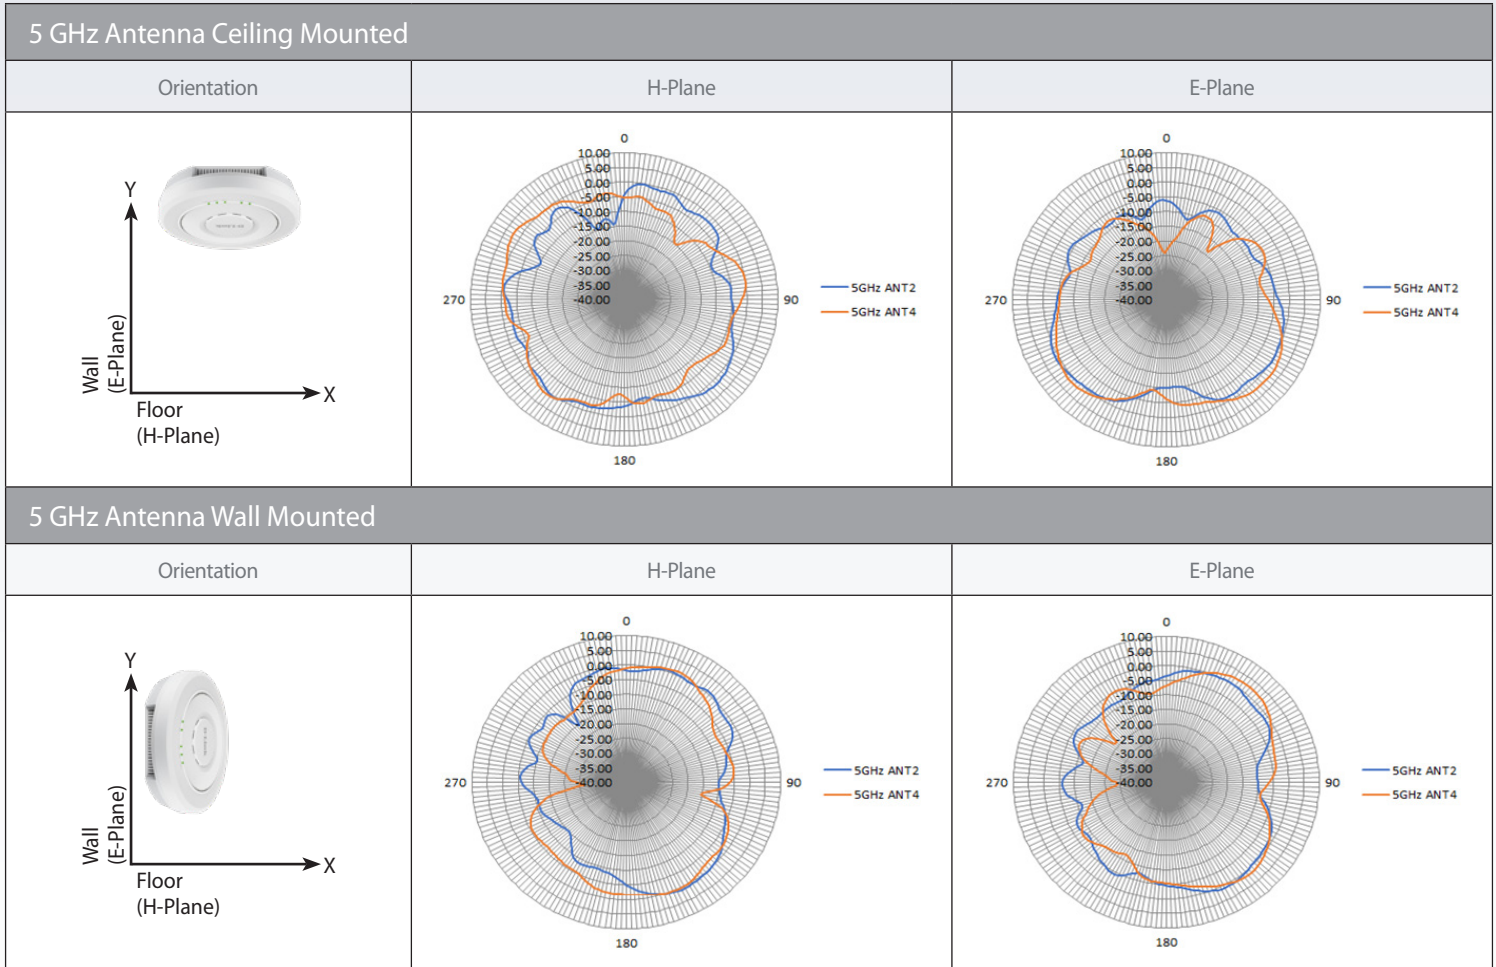

<sup>1</sup> Maximum wireless signal rate derived from IEEE standard 802.11 and 802.11ac specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors may adversely affect wireless signal range.

<sup>2</sup> This feature is available when Unified AP is used in conjunction with D-Link's line of Wireless Controllers (DWC-1000/ DWC-2000)

<sup>3</sup> The 2x2 smart antenna supports up to 81sets of radio patterns. The omni-directional mode is one such pattern.



For more information: [www.dlink.com](http://www.dlink.com)

D-Link European Headquarters. D-Link (Europe) Ltd., First Floor, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2018 D-Link Corporation. All rights reserved. E&OE.

Updated April 2018

