

DWM-301-TP

4G M2M PoE Router



Key Features



Plug and Play



PoE Connectivity PSE



SMS Event Management



VPN Security



Industrial Grade Design



Management Platform

Applications

- Traffic Light
- Small Shop
- Surveillance
- AMR

D-Link's DWM-301-TP 4G M2M PoE Router provides 4G-LTE cellular capability. Equipped with a Fast Ethernet port and supporting 802.3af/at PoE, this router ensures rapid and reliable connection to any local device, providing both power and data over a single cable for streamlined deployment.

Empower Weather Monitoring with 4G

The DWM-301-TP 4G M2M PoE router harnesses the power of 4G to deliver seamless data transfer, ensuring dependable connectivity. Ideal for environmental sensing in a wide range of application fields, this plug-and-play router simplifies installation for quick deployment. The DWM-301-TP offers reliable connectivity for real-time monitoring of temperature, humidity, and meteorological data.


Empower Your M2M Network with PoE+

The DWM PoE Router Series, featuring 802.3af/at Power over Ethernet (PoE+) technology, delivers both data and power through a single Ethernet cable. As a true PSE (Power Sourcing Equipment) solution, it streamlines M2M communication for IoT applications, reducing the need for separate electrical infrastructure and lowering installation costs. Ideal for powering surveillance cameras, digital signage, wireless access points, and IoT sensors, it offers flexible device placement without extra wiring. Its PD-Alive feature minimizes downtime, ensuring continuous operation, while PoE scheduling optimizes power use and cuts energy costs.

Robust Build Quality

The industrial-grade casing provides reliable high-speed connectivity in extreme conditions. The corrosion resistant zinc-plated steel case with wide operating temperature range and humidity tolerance mean that the DWM-301-TP is ready for the most demanding M2M applications in virtually any environment. Convenient DIN-rail mounting options allow the DWM-301-TP to be mounted virtually anywhere to optimize signal quality. The DWM-301-TP is also engineered to safely accept wide input voltage (VDC 48-57V) fluctuations, providing more flexibility and convenience when selecting a suitable power source, making your M2M installations significantly more reliable and much easier to deploy.

Connection Diagram

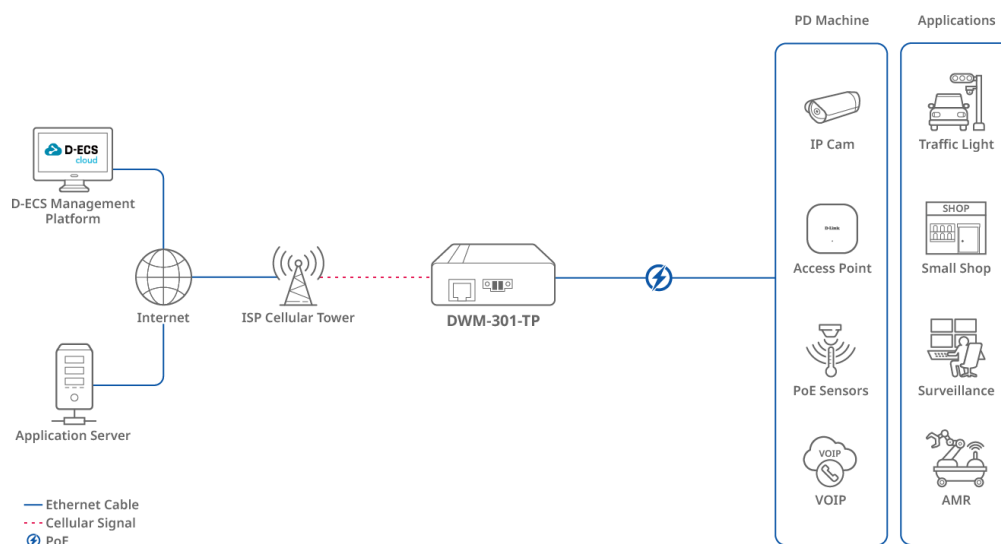

Specifications

Device Interface
- Cellular: 4G LTE Cat 4 - SIM Slot: 1 x SIM (4FF Nano SIM) - Ethernet: 1 x GE PoE LAN port with PoE-PSE 802.3at - PoE Max Power per Port (at PSE): 30 W max - PoE Power Budget (at PSE): 30 W - Power Input: DC 48-57 V terminal block - Antenna Connectors: 2 x SMA (F) cellular
Performance ¹
- Maximum Cellular Data Throughput: - LTE: 150 Mbps (DL) / 50 Mbps (UL)
WAN
- WAN Interface: Cellular - Cellular: NAT, bridge - Connection Monitoring: Ping query reboot
Network
- LAN: DHCP server - DDNS: DynDNS, No-IP, dynamic DO - PoE Functions: PD failure check, PoE scheduling
Services
Event Management: SMS
VPN
VPN Tunnel: OpenVPN
Security
- Firewall: IPS, port forward - Access Control: MAC/IP filter
Administration
- Management: D-Link D-ECS² - Maintenance: Web UI - System: FW upgrade, reboot and reset
Monitoring
- Device Status: Connection information - Cellular Status: Cellular information/status, cellular signal quality - Security: VPN status
Operating Environment
- Operating Temperature: -30 to 60°C (-22°F to 140°F) - Storage Temperature: -40 to 85°C (-40°F to 185°F) - Operating Humidity: 10% to 95% non-condensing - Storage Humidity: 0 to 95% non-condensing - Dimensions: 78 x 78 x 29 mm
Certifications and Approvals
- Certifications: CE, UKCA - Cyber Security: EN 18031-1, EN 18031-2
Package Contents (Standard)
2 x Cellular SMA Antennas 1 x RJ-45 Cable 1 x Power Adapter 1 x Terminal Block (2-pin) 1 x DIN-Rail Kit

Actual performances may vary due to settings, cabling, temperature, network configuration, interface, device compatibility, environmental and on-site conditions, and other similar factors. References to power capability, signal or processing speed, signal range or distance, data encryption, storage capacity, display properties, or other performance metrics are based on optimal conditions derived from industry standards and provided for informational purposes only. Specifications may be subject to change without prior notice.

Available Versions


EU SKU (HW: A1)	
4G LTE	FDD: B1/B3/B7/B8/B20/B28A
	TDD: B38/B40/B41

1 Data rates are theoretical. Data transfer rate depends on network capacity and signal strength.

2 You only have to pay a M2M device license fee when applying for D-ECS license.

Hardware

Front View

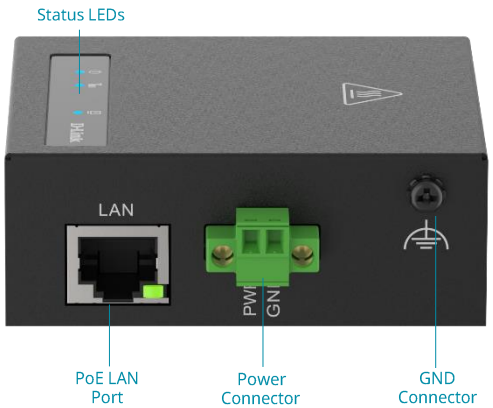


Back View



Spatial Measurement

The following diagrams provide the product's physical dimensions measured from top, front, left, and right views for installation and integration reference.

Unit: mm

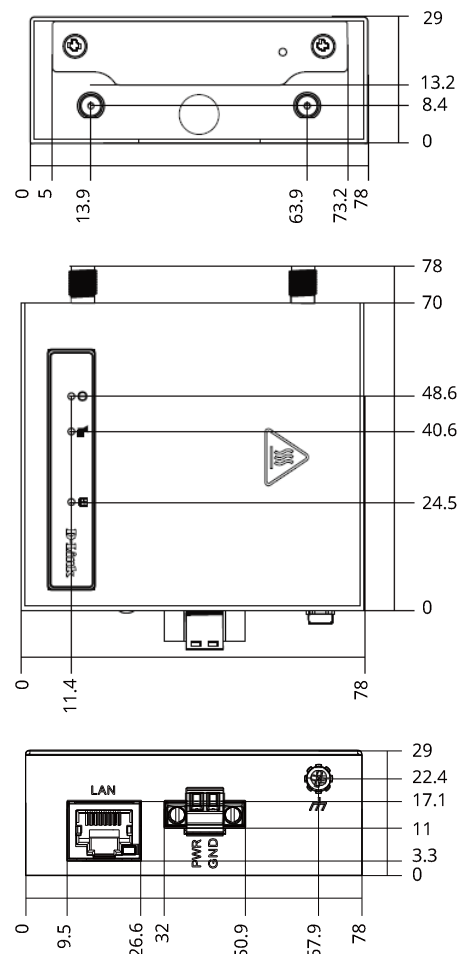

Mounting Space Requirements

